

2D Barcode Scanner User Manual



Factory Default



Version

Interface



USB(default)



RS232



USB-COM

Interface Description:

1. USB mode: The factory default setting is USB mode, driver-free.
2. Serial port mode: It needs to be equipped with a special serial port cable and used in the serial port receiving software (serial port default settings: baud rate: 9600, data bits: 8 bits, stop bit: 1 bit, check bit: none).
3. Virtual serial port: special driver needs to be installed.

Scan Mode



Manual(default)



Conitnuous



Auto sensing

Baud Rate



4800



9600



19200



38400



57600



115200

Note: When the serial port communication baud rate parameter is inconsistent with the host serial port software, it can be modified through the setting code.

End Character



CR(default)



CR & LF



TAB



None

Keyboard Language



USA(default)



Czech



French



German



Spain



Italy



Turkey Q



Turkey F

Buzzer



ON



OFF



High



Mid



Low

Prefix




Scan the "modify prefix" setting code and scan the data setting code together, and the user can modify the prefix content. For example: add the prefix character "A", find the character "A" in the compatible ASCII table (Appendix 2) and the corresponding hexadecimal values are "4" and "1". The steps are: first scan to modify the prefix, and then scan the character "4", "1", and finally scan and save.

Suffix




Note: The step method of adding suffix is the same as that of prefix.

Interleaved 2 of 5

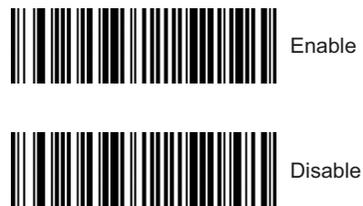

UPC-A to EAN13

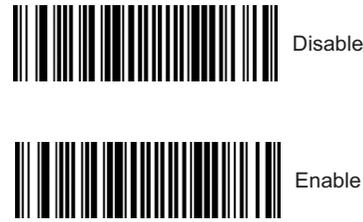

Appendix 1:



Appendix 2:

Hex	Char
00	NUL (Null char.)
01	SOH (Start of Header)
02	STX (Start of Text)
03	ETX (End of Text)
04	EOT (End of Transmission)
05	ENQ (Enquiry)
06	ACK (Acknowledgment)
07	BEL (Bell)
08	BS (Backspace)
09	HT (Horizontal Tab)
0a	LF (Line Feed)
0b	VT (Vertical Tab)
0c	FF (Form Feed)
0d	CR (Carriage Return)
0e	SO (Shift Out)
0f	SI (Shift In)
10	DLE (Data Link Escape)
11	DC1 (XON) (Device Control 1)
12	DC2 (Device Control 2)
13	DC3 (XOFF) (Device Control 3)
14	DC4 (Device Control 4)
15	NAK (Negative Acknowledgment)
16	SYN (Synchronous Idle)
17	ETB (End of Trans. Block)
18	CAN (Cancel)
19	EM (End of Medium)
1a	SUB (Substitute)
1b	ESC (Escape)
1c	FS (File Separator)
1d	GS (Group Separator)
1e	RS (Request to Send)
1f	US (Unit Separator)
20	SP (Space)
21	! (Exclamation Mark)
22	" (Double Quote)
23	# (Number Sign)
24	\$ (Dollar Sign)
25	% (Percent)
26	& (Ampersand)
27	' (Single Quote)
28	((Right / Closing Parenthesis)
29) (Right / Closing Parenthesis)
2a	* (Asterisk)
2b	+ (Plus)
2c	, (Comma)
2d	- (Minus / Dash)
2e	. (Dot)
2f	/ (Forward Slash)
30	0
31	1
32	2
33	3
34	4
35	5
36	6
37	7
38	8
39	9
3a	: (Colon)
3b	; (Semi-colon)
3c	< (Less Than)
3d	= (Equal Sign)
3e	> (Greater Than)
3f	? (Question Mark)

Hex	Char
40	@ (AT Symbol)
41	A
42	B
43	C
44	D
45	E
46	F
47	G
48	H
49	I
4a	J
4b	K
4c	L
4d	M
4e	N
4f	O
50	P
51	Q
52	R
53	S
54	T
55	U
56	V
57	W
58	X
59	Y
5a	Z
5b	[(Left / Opening Bracket)
5c	\ (Back Slash)
5d] (Right / Closing Bracket)
5e	^ (Caret / Circumflex)
5f	_ (Underscore)
60	' (Grave Accent)
61	a
62	b
63	c
64	d
65	e
66	f
67	g
68	h
69	i
6a	j
6b	k
6c	l
6d	m
6e	n
6f	o
70	p
71	q
72	r
73	s
74	t
75	u
76	v
77	w
78	x
79	y
7a	z
7b	{ (Left/ Opening Brace)
7c	(Vertical Bar)
7d	} (Right/Closing Brace)
7e	~ (Tilde)
7f	DEL (Delete)